

# The Most Cost-Effective decoding platform SoC

## Overview

F133-A/B is an advanced application processor designed for the video decoding platform. It integrates a 64-bit processor with RISC CPU instruction architecture to provide the most efficient computing power. F133-A/B supports full format decoding such as H.265, H.264, MPEG-1/2/4, JPEG, VC1, and so on. And the independent hardware encoder can encode in JPEG or MJPEG. Integrated multi ADCs/DACs and I2S/PCM/DMIC/OWA audio interfaces can provide the perfect voice interaction solution. F133-A/B supports rich display output interfaces to meet the requirements of the screen display in differentiated markets. F133-A/B can be used in network video machines, advertising machines, digital photo frames, car MP5, and so on.


## Highlights

- Integrated 64-bit RISC CPU processor provides powerful computing performance.
- The 1080p full format decoding, rich display output interfaces, and Allwinner SmartColor 2.0 display enhancement technology provide excellent video experience for users.
- To reduce the BOM cost, a 64 MB DDR2 die is embedded for F133-A/B.
- Rich peripheral interfaces, such as USB, SDIO, EMAC, TWI, UART, SPI, PWM, GPADC, IR TX&RX, and so on, greatly facilitate product expansion.
- The advanced process design with lower voltage and lower leakage, the power optimization design for typical scenes, and the enhanced heat dissipation package, improve the heating experience of the product.

## Features


CPU	<ul style="list-style-type: none"><li>• RISC CPU</li><li>• 32 KB I-cache + 32 KB D-cache</li></ul>
Memory	<ul style="list-style-type: none"><li>• SIP 64 MB DDR2</li><li>• SD3.0/eMMC 5.0, SPI Nor/NAND Flash</li></ul>
Video Engine	<ul style="list-style-type: none"><li>• Video decoding<ul style="list-style-type: none"><li>-H.265 up to 1080p@60fps</li><li>-H.264 up to 1080p@60fps</li><li>-MPEG-1/2/4, JPEG, VC1 up to 1080p@60fps</li></ul></li><li>• Video encoding<ul style="list-style-type: none"><li>-JPEG/MJPEG up to 1080p@60fps</li><li>-Supports input picture scaler up/down</li></ul></li></ul>
Display Engine	<ul style="list-style-type: none"><li>• Allwinner SmartColor2.0 post processing for an excellent display experience</li><li>• Supports de-interlacer (DI) up to 1080p@60fps</li><li>• Supports G2D hardware accelerator including rotate, mixer, lbc decompression functions</li></ul>
Video OUT	<ul style="list-style-type: none"><li>• CVBS OUT interface, supporting NTSC and PAL format</li><li>• RGB LCD output interface up to 1920 x 1080@60fps</li><li>• Dual link LVDS interface up to 1920 x 1080@60fps</li><li>• 4-lane MIPI DSI interface up to 1920 x 1200@60fps</li></ul>
Video IN	<ul style="list-style-type: none"><li>• 8-bit parallel CSI interface</li><li>• CVBS IN interface, supporting NTSC and PAL format (only for F133-B)</li></ul>
Audio	<ul style="list-style-type: none"><li>• 2 DACs and 3 ADCs</li><li>• Analog audio interfaces: MICIN3P/N, LINEINL/R, FMINL/R, HPOUTL/R</li><li>• Digital audio interfaces: I2S/PCM, DMIC, OWA IN/OUT</li></ul>
Connectivity	<ul style="list-style-type: none"><li>• USB2.0 DRD, USB2.0 Host</li><li>• SDIO 3.0, SPI x 2, UART x 6, TWI x 4</li><li>• PWM (8-ch), GPADC (1-ch), TPADC (4-ch), IR TX&amp;RX</li><li>• 10/100/1000M EMAC with RMII and RGMII interfaces</li></ul>
Package	<ul style="list-style-type: none"><li>• eLQFP128, 14 mm x 14 mm</li></ul>

# Block Diagram

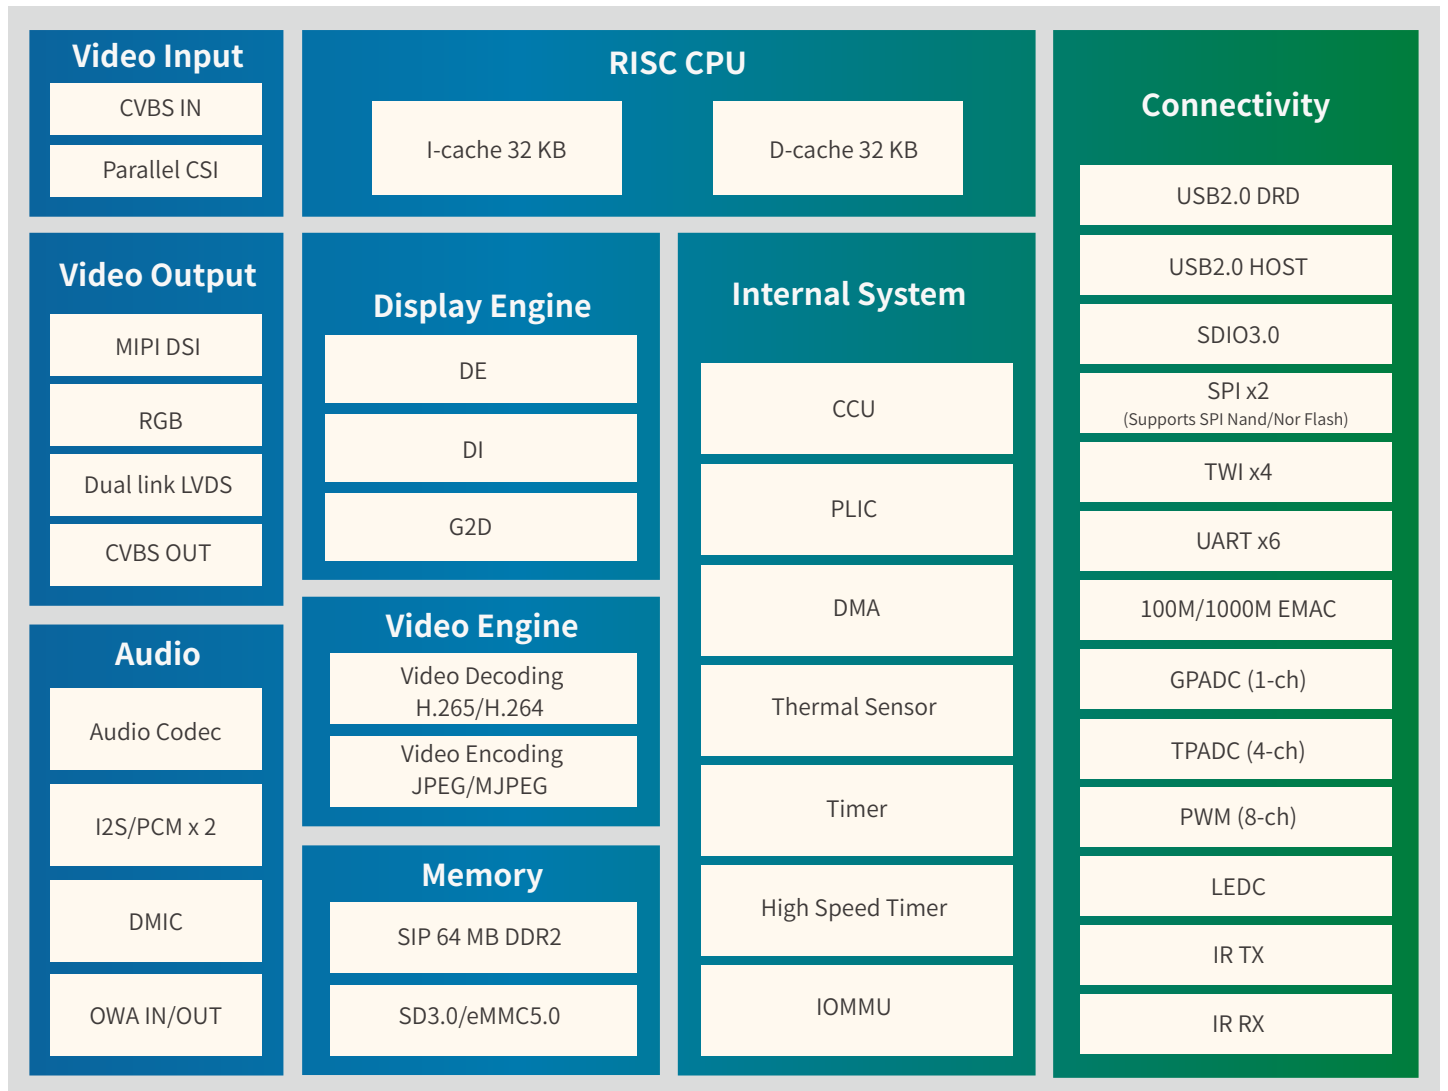

Note: F133-A does not support CVBS IN interface.

# Application Diagram

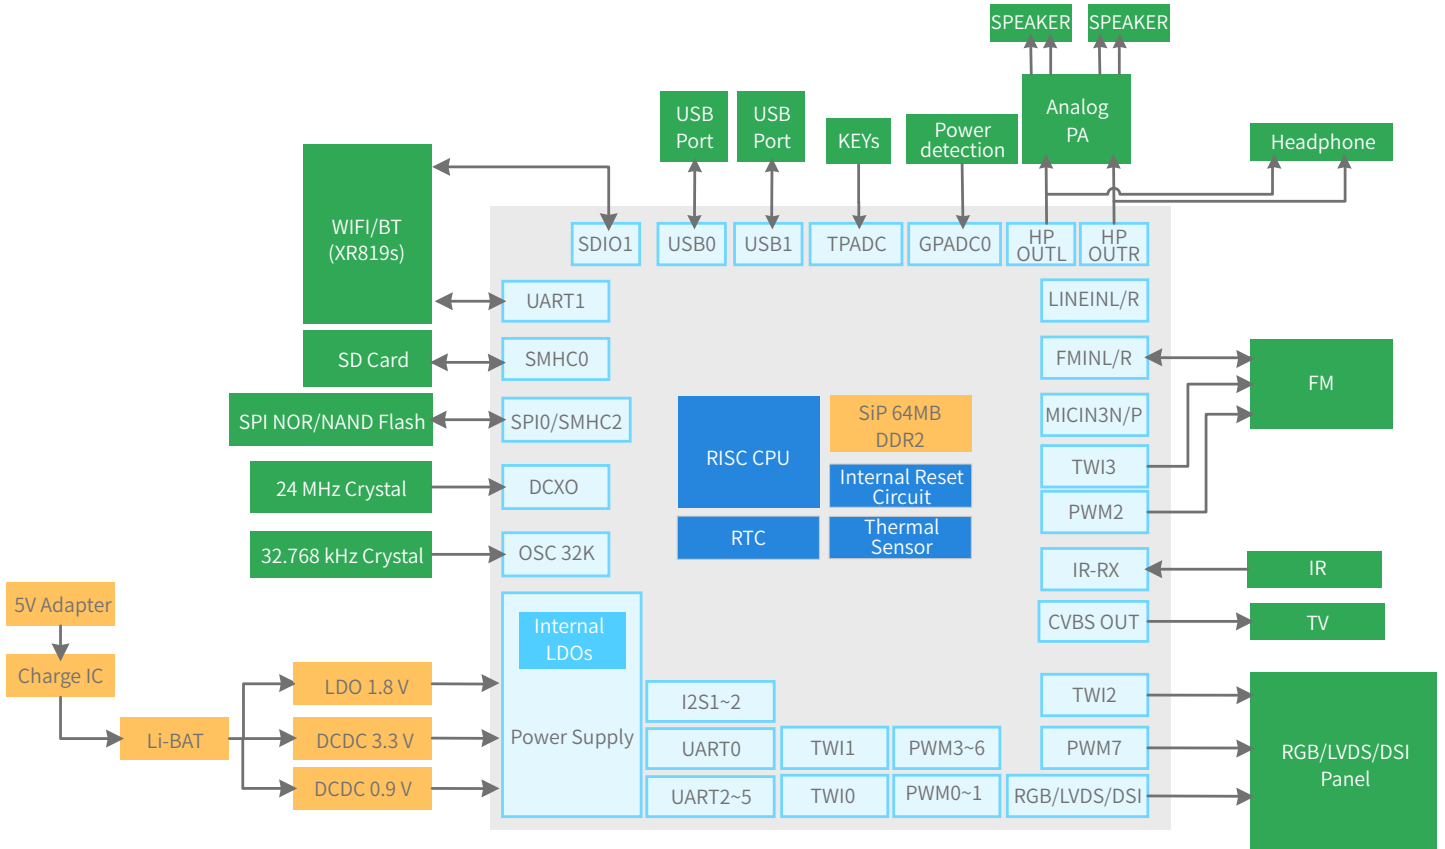

## ABOUT ALLWINNER

Allwinner Technology is a leading fabless design company dedicated to smart application processor SoCs and smart analog ICs. Its product line includes multi-core application processors for smart devices and smart power management ICs used by brands worldwide.

With its focus on cutting edge UHD video processing, high performance multi-core CPU/GPU integration, and ultra-low power consumption, Allwinner Technology is a mainstream solution provider for the global tablet, internet TV, smart home device, automotive in-dash device, smart power management, and mobile connected device markets. Allwinner Technology is headquartered in Zhuhai, China.

## CONTACT US

For more product info, please contact [service@allwinnertech.com](mailto:service@allwinnertech.com), or scan the QR code to follow us on Wechat.

This brief is for reference only and has no commitment. All content contained herein is subject to changes without notice.  
©2020 Allwinner Technology Co., Ltd.

